






* RESIDENTIAL

* COMMERCIAL

* INDUSTRIAL



SUSPENDED LED PROFILE

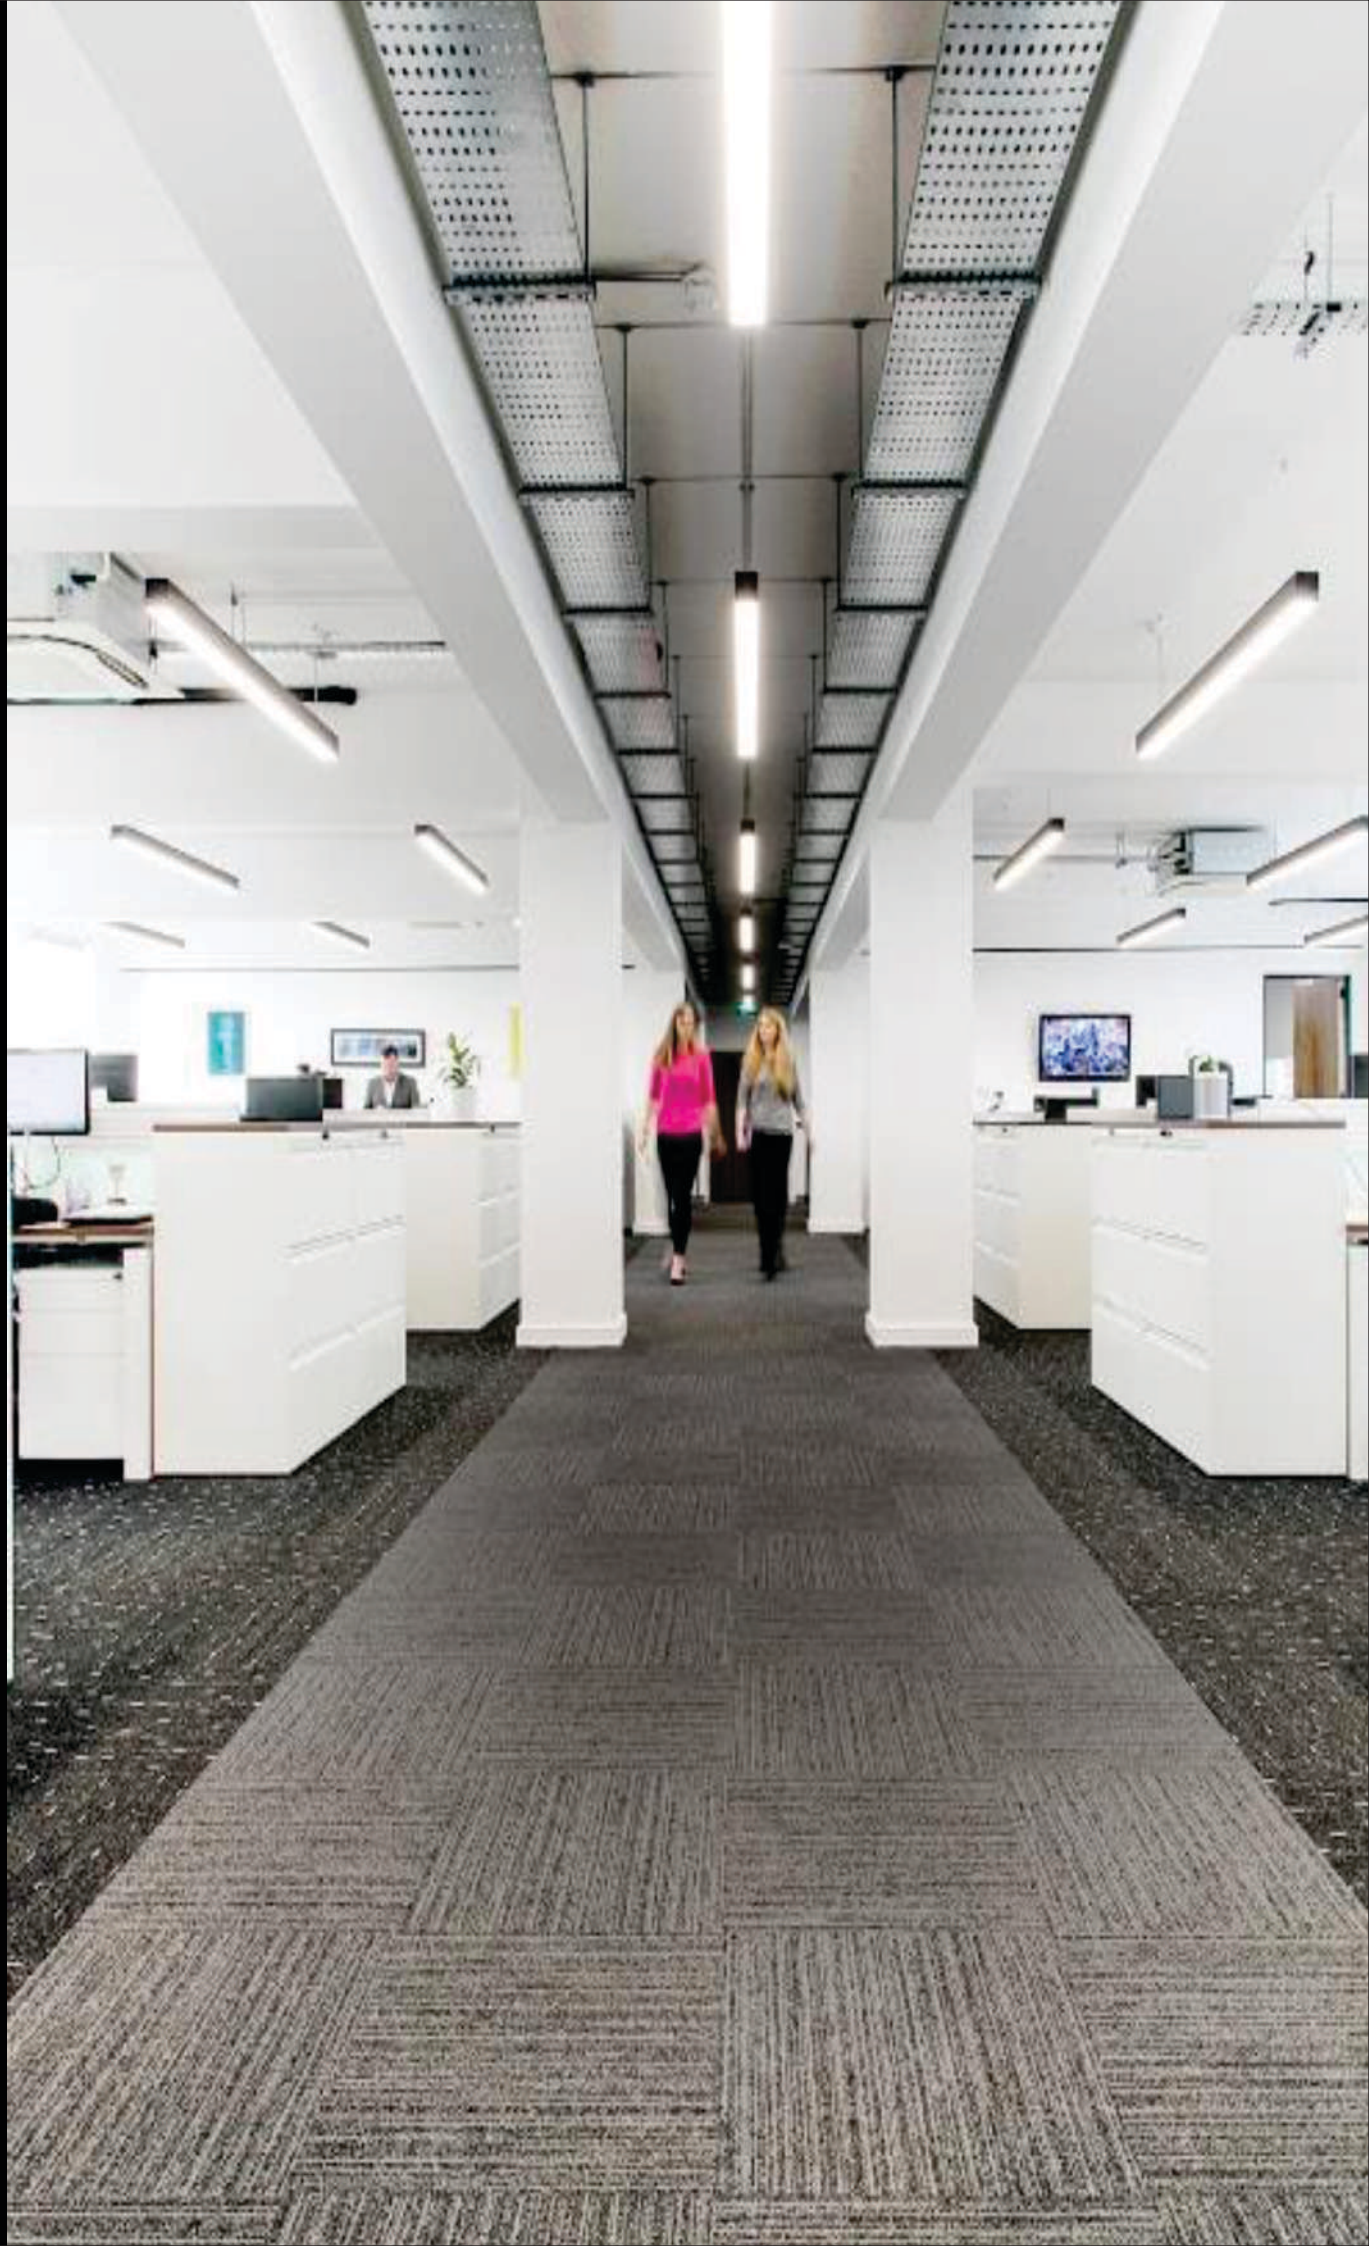



Most of Visco Lighting's suspended extrusions are designed to be installed via surface mounted as well. This gives you more flexibility for your lighting installation. Perfect to be installed to provide modern lighting over desk or bench top, kitchen lighting, retail display lighting, interior lighting, educational lighting and more.

THIS DISTINGUISHES OUR VISCO

ROUND, SQUARE OR LINEAR



The design of Visco luminaires offers almost any light distribution - thanks to lens / reflector technology that's independent of the luminaire Visco geometry.

LIGHT FOR VIDEO MEETINGS



The light of our luminaires with in-house developed driver is flicker-free and therefore ideal for video conferences, retail spaces and good for health as well.

EXTREMELY DURABLE



Due to our excellent maintenance of Visco flux, Visco luminaires feature high investment security: L80/B10 with up to 50,000 operating hours. At 12 hours a day, this means over 10 years of low-maintenance operation with outstanding photometric characteristics - ideal for locations.

TUNABLE WHITE TECHNOLOGY



Just as the outdoor colour temperature changes during the day the colour temperature of lighting indoors can be adjusted to support different lighting concepts.

VERY HIGH VISUAL COMFORT



Darklight reflectors or anti-dazzle louvres: both enable standard compliant lighting with $UGR < 19$.

SETTING MAGICAL ACCENTS WITH SPOT LIGHTS



Visco spot lights blend almost invisibly into the architecture helping create magical accents with
8° - 12° Narrow spot
24° - 30° Spot
36° - 40° Flood
50° - 60° Wide Flood
110° - 120° Extra wide flood





ULTRA-EFFICIENT LIGHTING



Lighting accounts for approximately 20 percent of electricity use in both domestic and commercial applications. Visco offers a complete line of LED lighting solutions that significantly reduce electricity consumption and operating costs through high power factor control gear.

COLOUR RENDERING INDEX



Visco light source helps to reveal the truest colors of various objects in comparison with natural light source with our CRI > 80+ versions.

SHALLOW RECESS DEPTH



In tight installation situations every millimeter is decisive. Just 45mm is sufficient for especially deep recessed luminares.

EXCELLENT THERMAL MANAGEMENT




The design of our housings made of high grade cast aluminum ensure outstanding thermal management enabling long life span.

WIDE SPECTRUM OF CCT



Visco offers a wide range of Correlated Colour Temperature (CCT) from 2700K to 6500K for various application in residences, offices and hotels.

CONNECTIVITY



Wireless or wired
With technologies such as bluetooth and Dali we always offer you the right interface.

INDEX



LED Strip and Profile

Page No.

* Up - Down Profile	1 - 2
* Glass Shelf Profile	1 - 2
* Recessed Profile	3 - 4
* Surface Profile	5 - 6
* Corner Profile	7 - 8
* Hanger Profile	7 - 8
* Furniture Special Profile	9 - 10
* Bendable Profile	9 - 10
* Hanging Profile	11 - 12
* Trim Profile	13 - 14
* Walk Over Profile	13 - 14
* Azodized / PU Profile	15 - 16
* Neon	17 - 19
* Mono & RGB Controller	20
* DMX	21 - 22
* Madrix Lighting Control	23 - 24
* Visco PCB 12V DC	25 - 26
* Visco PCB 24V DC	25 - 26
* Visco PCB 240 LED 16mm, 1.2mm	27 - 28
* Visco PCB Tunable RGB	27 - 28
* Visco PCB 90 LED 20mm	29 - 30
* Visco Switch ON / OFF	29 - 30
* Visco Driver Dimmable	31 - 32
* Visco 12V DC Driver	31 - 32
* Visco Changer	33 - 34
* Visco Sensor	33 - 34
* STRETCH FABRIC	35 - 38
* FIBRE OPTIC LIGHTING	39 - 43
* MEDIA PIXEL PANEL	44 - 46




DOWNLIGHTERS

* Enzo Cob Light (7 Watt)	54 - 55
* Enzo Cob Light (12 Watt)	56 - 57
* Crest Surface Light (7 Watt)	58 - 59
* Crest Surface Light (12 Watt)	60 - 61
* Spot Light Down Lighter (2 Watt)	62 - 63
* Spot Light Down Lighter (3 Watt)	64 - 65
* Adjustable Down Lighting (12/18 Watt)	66 - 67
* Laser Blade Down Lighting (12 Watt)	68 - 69
* Track Light Down Lighter (12 Watt)	70 - 71
* Magnetic Down Light	72




The background is a solid black field. It is populated with several bright, diagonal streaks of light that appear to be out of focus or blurred, creating a sense of motion and depth. These streaks vary in brightness and width, with some being more prominent than others. They generally trend from the upper left towards the lower right, though some are more vertical or horizontal depending on the perspective.

LINEAR^{SERIES}


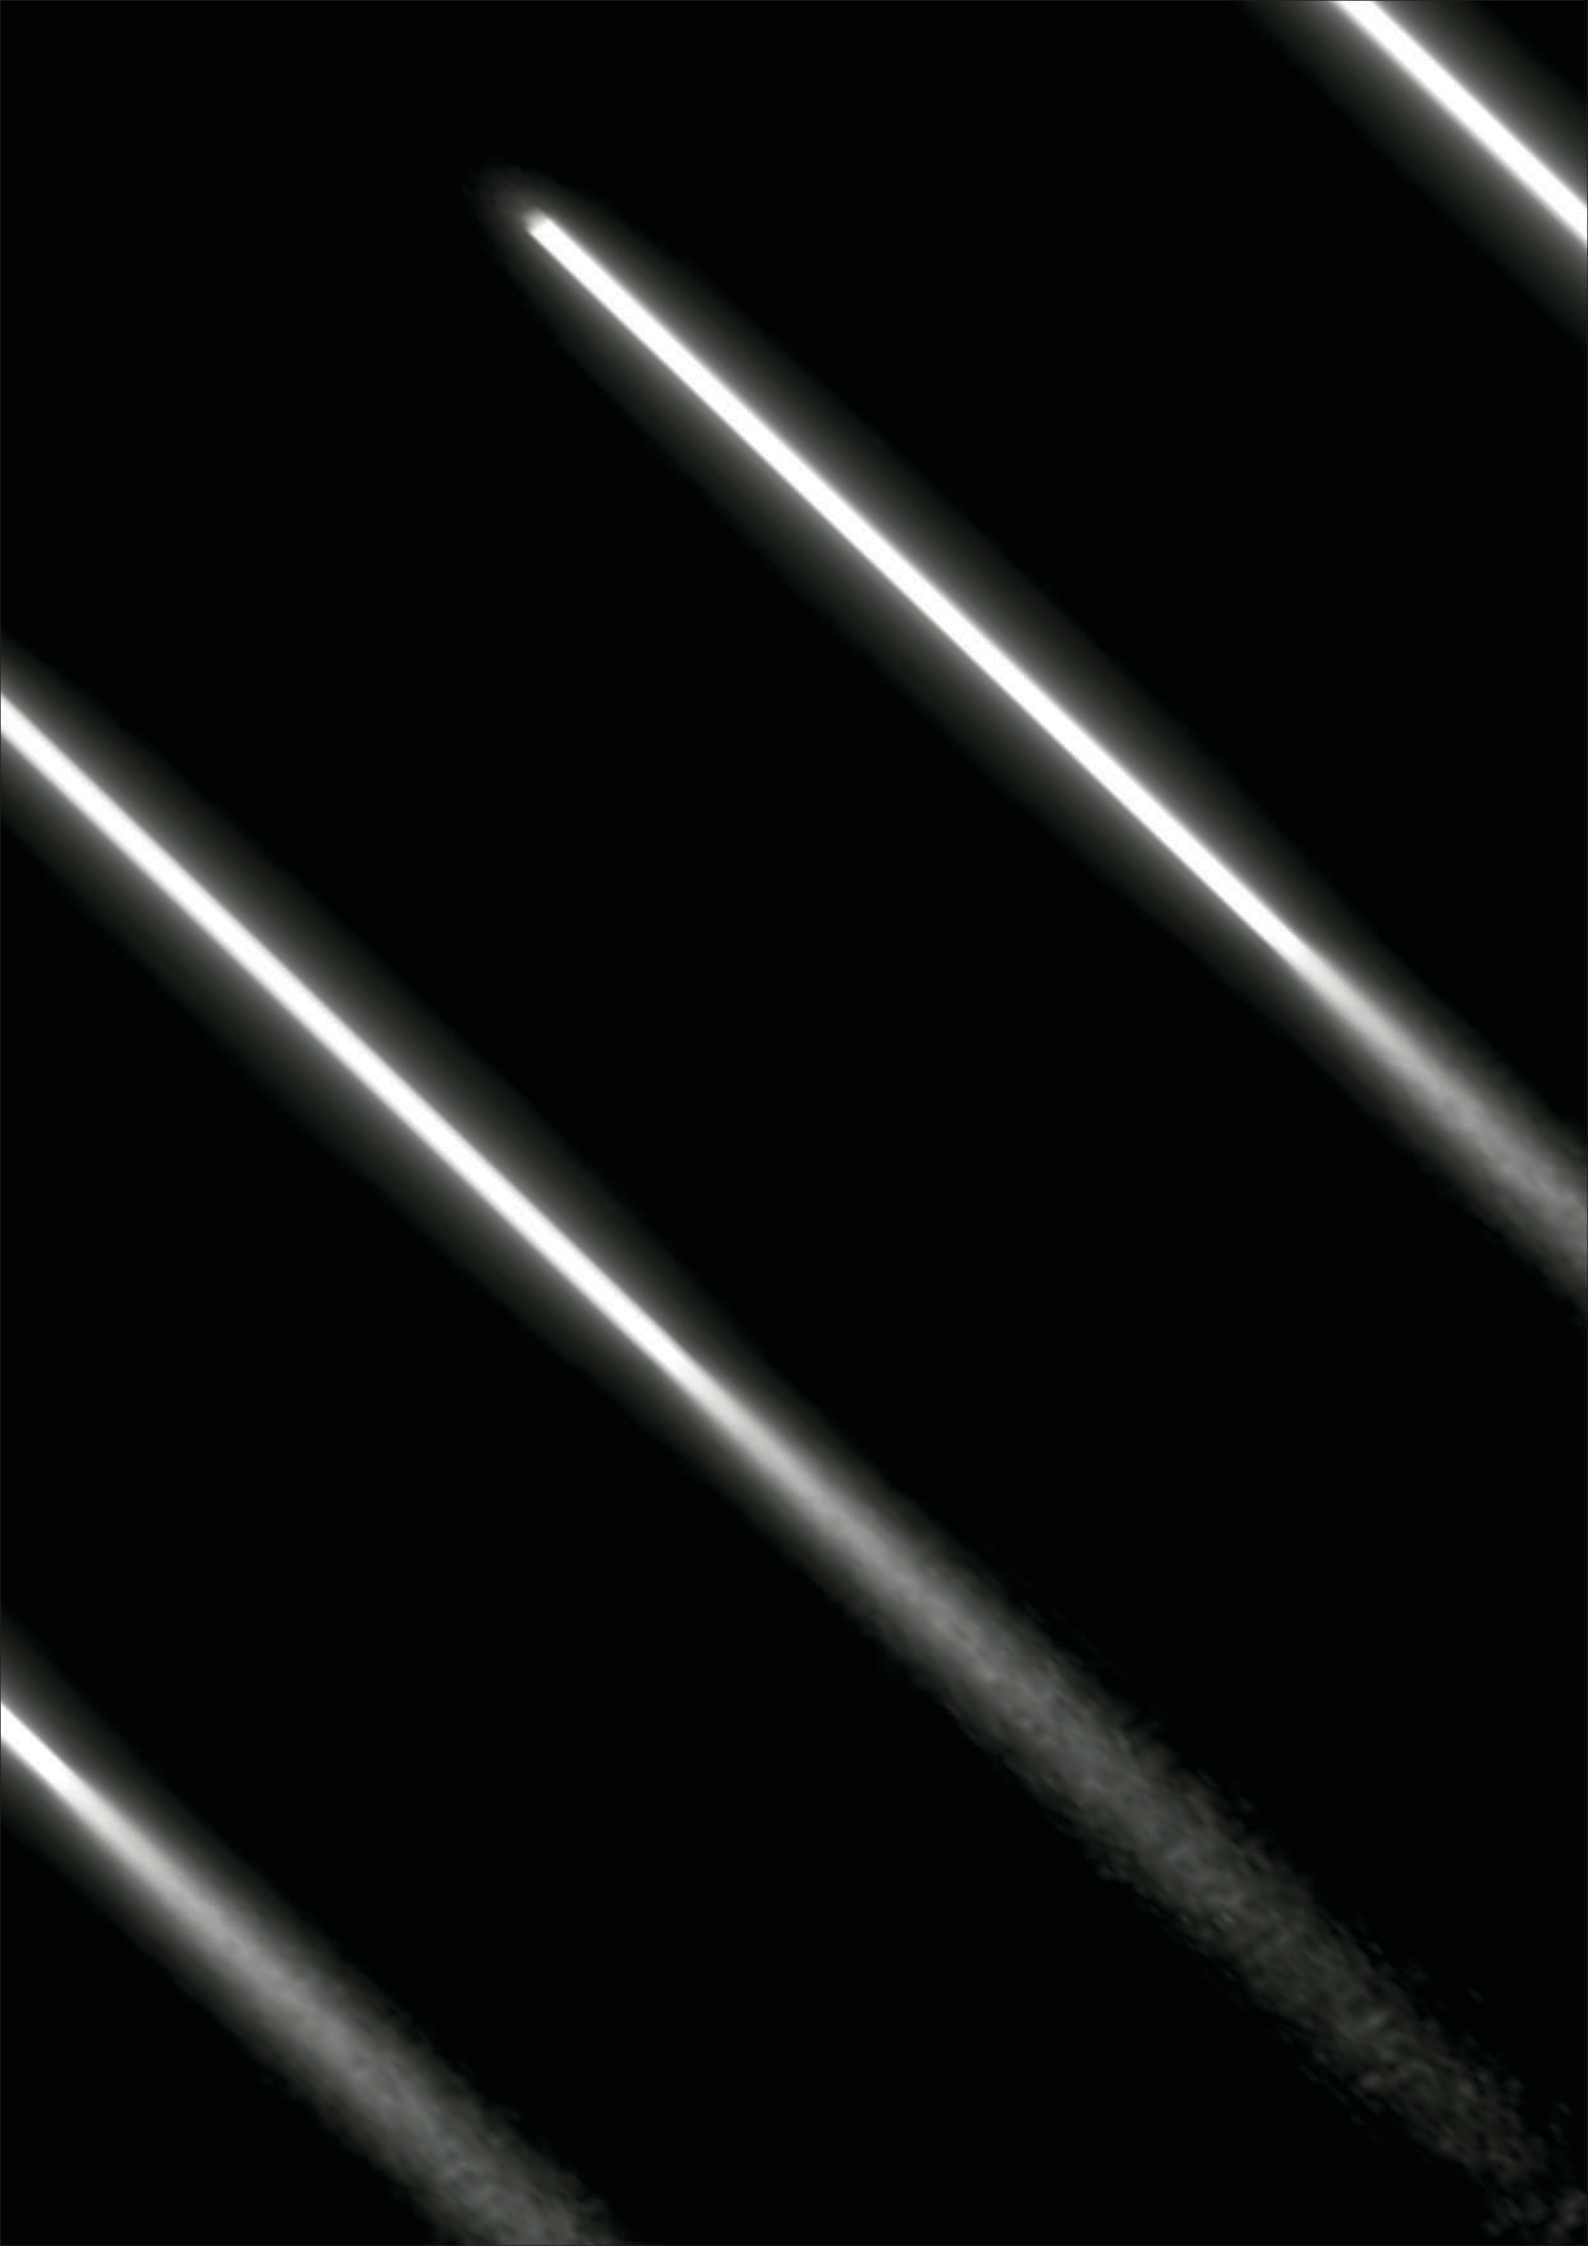



UP - DOWN PROFILE

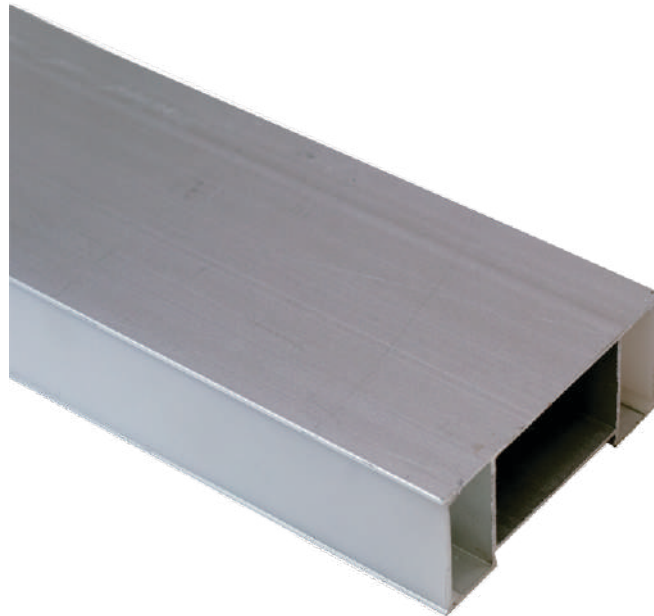

GLASS SHELF PROFILE










		MODEL	SIZE	MAXIMUM	PCB
		SLIM UP-DOWN	50*17 MM	3 Meter	10 MM
		BROAD UP-DOWN	90*42MM	3 Meter	12 MM

		MODEL	SIZE	MAXIMUM	PCB
		GLASS SHELF PROFILE	17*11MM	3 Meter	5 MM











RECESSED PROFILE



	MODEL	SIZE	MAXIMUM	PCB
	1013 Trim	10x13 MM	3 Meter	5 MM
 	1612 Trim	16x12 MM	3 Meter	10 MM
 	1707 Trim	17x7 MM	3 Meter	10 MM
	1408 Trim	14x8 MM	3 Meter	10 MM
 	2510 Trim	25x10 MM	3 Meter	15 MM
 	2525 Trim	25x25 MM	3.6 Meter	15 MM
 	3535 Trim	35X35 MM	3.6 Meter	30 MM
 	5035 Trim	50X35 MM	3.6 Meter	30 MM
 	5050 Trim	50X50 MM	3.6 Meter	30 MM

SURFACE PROFILE





		MODEL	SIZE	MAXIMUM	PCB
		0809 Trimless	7.8X9 MM	3 Meter	5 MM
		1013 Trimless	9.9X13 MM	3 Meter	5 MM
		1707 Trimless	17X7 MM	3 Meter	10 MM
		1714 Trimless	16.8X14.3 MM	3 Meter	10 MM
		2310 Trimless	23.3X9.6 MM	3 Meter	15 MM
		2518 Trimless	25X18 MM	3 Meter	15 MM
		2626 Trimless	26X26 MM	3 Meter	15 MM
		3520 Trimless	35x20 MM	3 Meter	15 MM
		3535 Trimless	35x35 MM	3 Meter	30 MM
		5035 Trimless	50x35 MM	3.6 Meter	30 MM


CORNER PROFILE




HANGER PROFILE



		MODEL	SIZE	MAXIMUM	PCB
		1616	16x16 MM	3 Meter	10 MM
		1818	18x18 MM	3 Meter	10 MM



		MODEL	SIZE	MAXIMUM	PCB
		2010	20x10 MM	3 Meter	10 MM


FURNITURE SPECIAL PROFILE

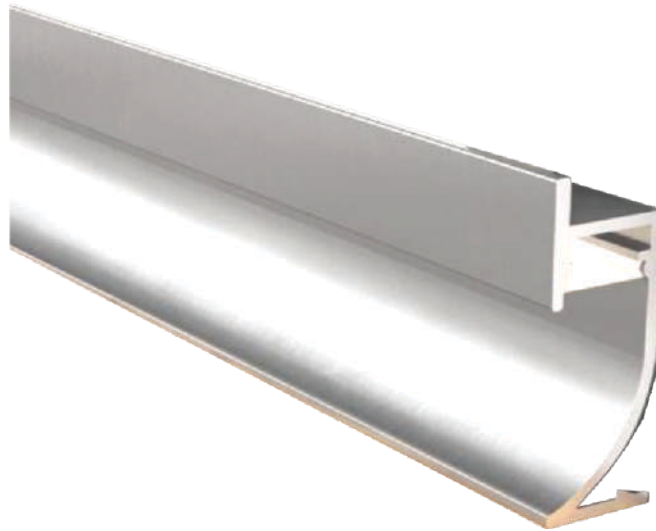

BENDABLE PROFILE






		MODEL	SIZE	MAXIMUM	PCB
		ANGULAR	20x8 MM	3 Meter	5 MM
		SHELF UP-DOWN	20x15 MM	3 Meter	10 MM

		MODEL	SIZE	MAXIMUM	PCB
		BENDABLE	18x4 MM	3 Meter	10 MM

HANGING PROFILE








		MODEL	SIZE	MAXIMUM	PCB
		3566	35x66 MM	3 Meter	15 MM
		5575	55x75 MM	3 Meter	30 MM
		7590	75x90 MM	3.6 Meter	30 MM


TRIM PROFILE




WALK OVER PROFILE

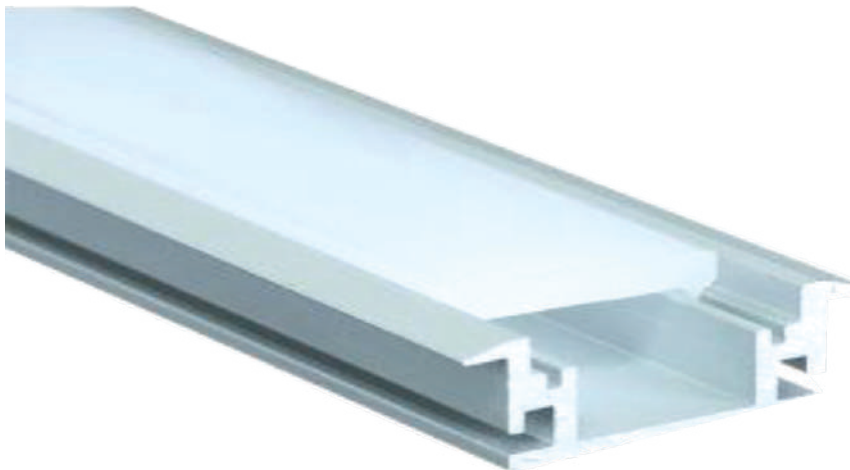

		MODEL	SIZE	MAXIMUM	PCB
		1213	50x13 MM	3 Meter	5 MM
		2314	66x13 MM	3 Meter	10 MM
		1213 SET IN	38x23 MM	3 Meter	5 MM
		1213 SET OUT	48x21 MM	3 Meter	5 MM

		MODEL	SIZE	MAXIMUM	PCB
		WALKOVER	27x11 MM	3 Meter	10 MM








ANODIZED/PU PROFILE







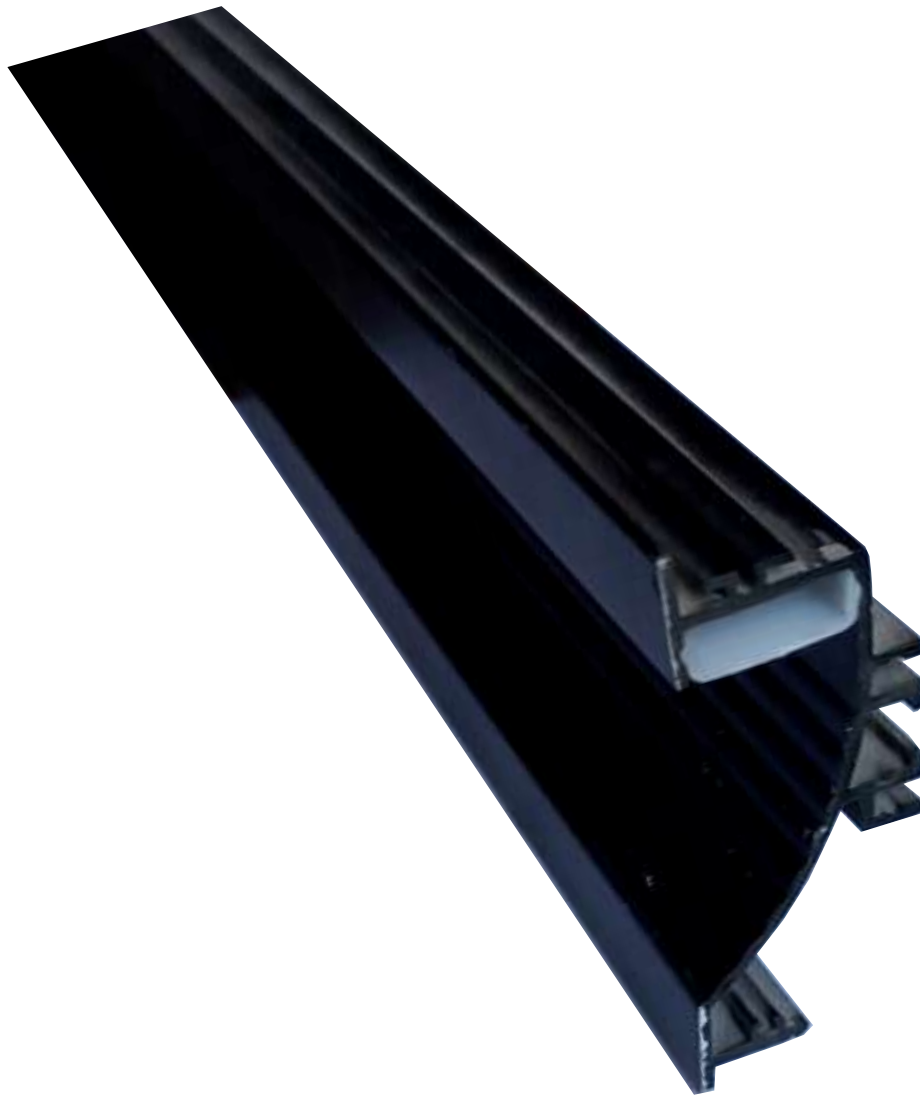


	MODEL	SIZE	MAXIMUM	PCB
	3280	32x80 MM	3 Meter	10 MM

NEON

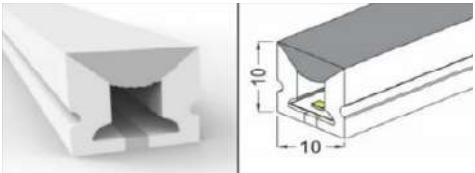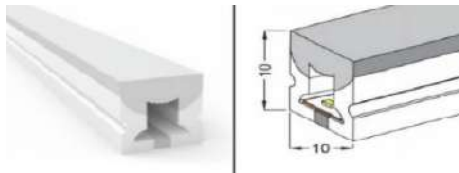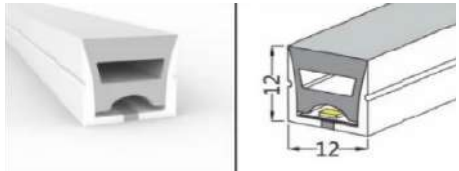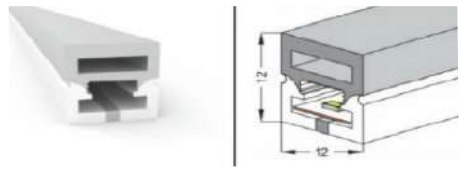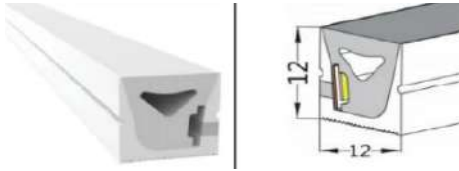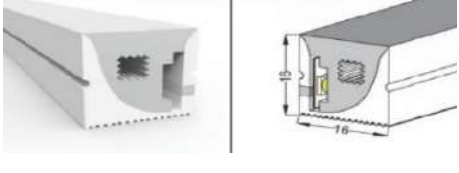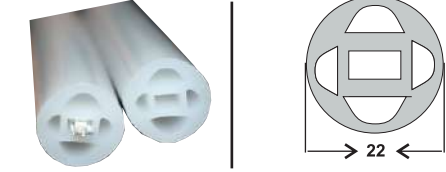

		MODEL	SIZE	MAXIMUM	PCB
		NF 10	1010	100 Meter	6 MM
		NF 10-2	1010-2	100 Meter	6 MM
		NF 12	1212	100 Meter	8 MM
		NF 12-2	1212-2	100 Meter	8 MM
		NF 12-3	1212-3	100 Meter	5 MM
		NF 16	1616	100 Meter	10 MM
		NF 16-2	1616-2	100 Meter	10 MM
		NF 22	2222	100 Meter	5 MM

		MODEL	SIZE	MAXIMUM	PCB
		NF 2014	2014	100 Meter	12 MM
		NF 2014-2	2014-2	100 Meter	12 MM
		NF 20	2020	100 Meter	10 MM
		NF 2020-2	2020-2	100 Meter	10/12 MM
		NF 3020	3020	100 Meter	15 MM
		NF 4025	4025	100 Meter	20 MM
		NF 5025	5025	100 Meter	20 MM

MONO & RGB CONTROLLER



- The Controls Can Be App Based, Remote Based.
- **DMX** And **MADRIX** Based Based Upon Size Of The Project.

DMX



Madrix



DMX



SPECIFICATION

- * CONTROL MODE : DMX512**
- * POWER INPUT : DC+9-12V**
- * OUTPUT : AC230V-50Hz (AC120V-60Hz) 300Ma, DC9V300Ma**
- * DIMENSIONS : 482 X 132 X 73 MM**
- * CHANNEL : 192CH**
- * CONTROL UP TO : 16 INTELLIGENT LIGHTS**


MADRIX LIGHTING CONTROL



MADRIX LIGHTING CONTROL



VISCO PCB 12V DC

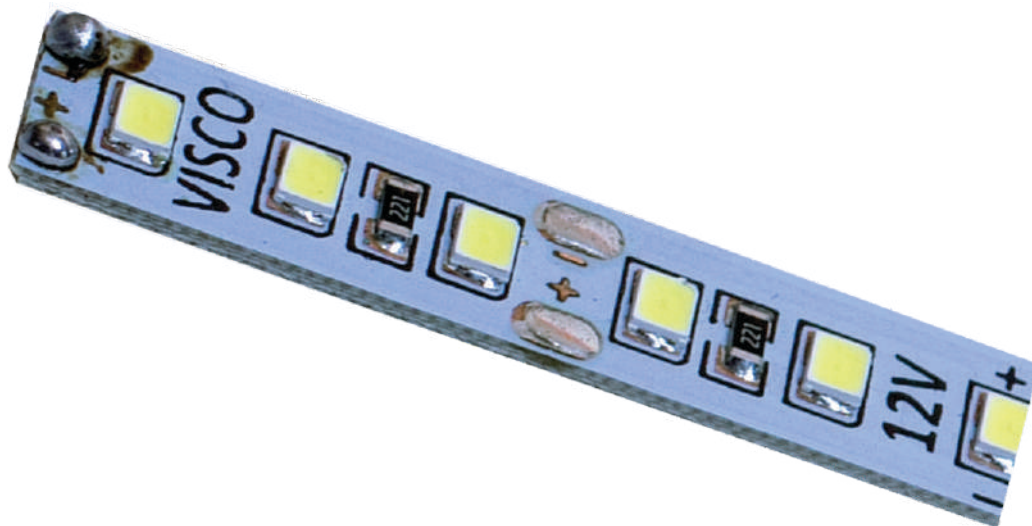

VISCO PCB 24V DC



SPECIFICATION

- * 12V DC
- * SIZE : 10MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE MOUNTED RIGID
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

SPECIFICATION

- * 24V DC
- * SIZE : 10MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

VISCO PCB 240 LED 16MM, 1.2 MM



VISCO PCB TUNABLE RGB



SPECIFICATION

- * 12V DC / 24V DC
- * SIZE : 16MM, 1.2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 18W/28W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

SPECIFICATION

- * 24V DC
- * SIZE : 25MM, 2MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W/15W-METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * RED, GREEN, BLUE, WHITE
- * IP-20, IP-65, IP-67

VISCO PCB 90 LED 20 MM



VISCO SWITCH ON / OFF



SPECIFICATION

- * 12V DC / 24V DC
- * SIZE : 20 MM
- * MATERIAL : FR4
- * INSTALLATION : SURFACE
- * WATTAGE : 10W PER METER
- * DISTRIBUTION : 120*
- * LUMIN : 90 LUMIN / WATT
- * CRI : 80 +
- * COLOUR TEMP : 2700K, 3000K, 4000K, 6000K
- * RED, GREEN, BLUE, PINK, AMBER
- * IP-20, IP-65, IP-67

SPECIFICATION

- * COLOUR AVAILABLE WHITE / BLACK
- * SIZE - 25x25x10 MM

VISCO DRIVER DIMMABLE



VISCO 12V DC DRIVER




SPECIFICATION

- * **DC - 12V/24V-DIMMABLE**
- * **SIZE : L-195mm, B-100mm, H-45mm**
- * **PHASE CUT DRIVER : TRACK DIMMING**
- * **INPUT VOLTAGE : AC-90-240V, 50-60HZ**
- * **OUTPUT : DC-12V@10AMP 120W**
- * **AUTO CUT TIMMER : 4hr, 6hr, 8hr, 12hr**

SPECIFICATION

- * **CONSTANT VOLTAGE**
- * **OUTPUT 12V DC : Current - 2amp, 3.5amp, 5amp, 10amp, 16.5amp**
- * **INPUT VOLTAGE**
- * **AC-90-240V, IP-20, IP-65**

VISCO CHANGER

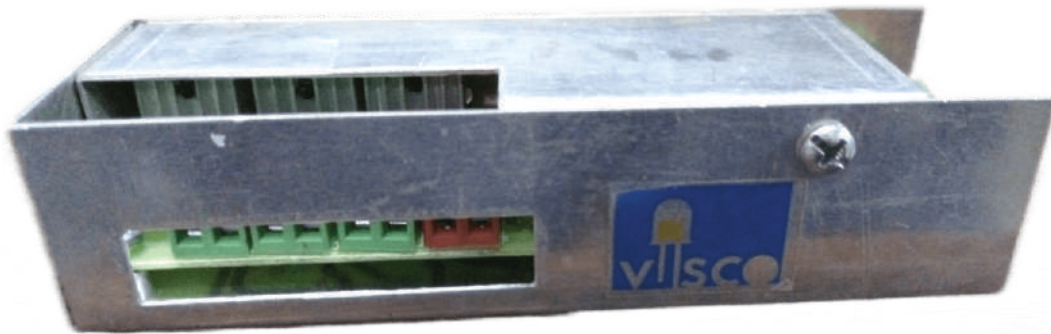

VISCO SENSOR



SPECIFICATION

- * **3 PHASE CHANGER**
SWITCHING ON/OFF
- * **INPUT VOLTAGE : 12V-DC**
- * **SIZE : L-130mm, B-40mm, H-40mm**

SPECIFICATION

- * **POWER SUPPLY DC 12V**
- * **MAX. SWITCHING CAPACITY 60W**
- * **CABLE LENGTH 1500mm**
- * **SENSOR DISTANCE 5-10cm**
- * **APPLICATION : CABINETS, WARDROBES & DRAWERS**
- * **DUST PROOF AGAINST SOLID THINGS &**
- * **WATER PROOF LEVEL IP 20**



3D STRETCH CEILING



**3D Printing &
Lighting Solution**

STRETCH FABRIC & CEILING



STRETCH FABRIC

STRETCH FABRIC	SIZE	THICKNESS
Translucent	Max. 126 (INCH)	00.18 (MM)
Translucent	Max. 196 (INCH)	00.18 (MM)
UV Print 3 Layer	Max. 126 (INCH)	00.25 (MM)
UV Print 3 Layer	Max. 196 (INCH)	00.25 (MM)

LED LIST

LED	SIZE	THICKNESS	CURRENT
INTRIGATED LED (3/4/6/10 K)	2.5 × 2.5 (INCH)	FR 4	12/24 V
RIGD LENS BAAR (3/4/6/10 K)	39.37 (INCH) LENGTH	FR 4	12/24 V
LED MODULE 3 EYE (3/4/6/10 K)	2.5 × 2.5 (INCH)	FR 4	12/24 V
INTRIGATED LED CCT TUNNABLE 8 LENS	2.5 × 2.5 (INCH)	FR 4	12/24 V
INTRIGATED LED RGBW	2.5 × 2.5 (INCH)	FR 4	12/24 V



UV PRINTED CEILING



MOVING CLOUD CEILING



TRANSLUCENT CEILING



PRINTED CEILING



SKY PRINTED CEILING





DREAMSOL TILE



Fibre Optic Lighting

Product Catalogue



VISCO FIBER OPTICAL ROLL



NAME : OPTICAL ROLL
 SIZE : 0.25MM
 LENGTH : 12000 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 0.5MM
 LENGTH : 6000 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 0.75MM
 LENGTH : 2700 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 1.0MM
 LENGTH : 1500 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 1.5MM
 LENGTH : 700 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 2.0MM
 LENGTH : 350 M/R
 QTY. : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 2.5MM
 VOLTAGE : 250 M/R
 POWER : 1 ROLL



NAME : OPTICAL ROLL
 SIZE : 3MM
 VOLTAGE : 150 M/R
 POWER : 1 ROLL

VISCO OPTICAL FIBER ROLL

★ ★ ★



NAME : CK-20
SIZE : 0.5MM
LENGTH : 6000 M/Roll
QTY : 1 ROLL
HOLE SIZE : 0.5MM



NAME : CK-30
SIZE : 0.75MM
LENGTH : 2700 M/Roll
QTY. : 1 ROLL
HOLE SIZE : 0.75MM



NAME : CK-40
SIZE : 1.00MM
LENGTH : 1500 M/Roll
QTY. : 1 ROLL
HOLE SIZE : 1.00MM



NAME : CK-60
SIZE : 1.5MM
LENGTH : 700 M/Roll
QTY : 1 ROLL
HOLE SIZE : 1.5MM



NAME : CK-80
SIZE : 2.0MM
LENGTH : 250 M/Roll
QTY. : 1 ROLL
HOLE SIZE : 2.0MM



NAME : CK-120
SIZE : 3.0MM
LENGTH : 150 M/Roll
QTY. : 1 ROLL
HOLE SIZE : 3.0MM

LIGHT ENGINES



NAME : RGBW Led Light Engine With Remote
Mobile App & Music Control
(Without Twinkle)

SIZE : 38*65*120mm

VOLTAGE : DC12V

POWER : 7W / 16W

COLOR : RGBW

HOLE SIZE : 20mm



NAME : RGBW Twinkle Effect Engine With
Remote, Mobile App & Music Control

SIZE : 55*95*160mm

VOLTAGE : DC12V

POWER : 7W / 16W

COLOR : RGBW

HOLE SIZE : 20mm



NAME : RGBW Twinkle + White Shooting Star
Twinkle Effect Engine With Remote,
Mobile App & Music Control

SIZE : 55*95*180mm

VOLTAGE : DC12V

POWER : 16W

COLOR : RGBW + White

HOLE SIZE : 20mm + 6mm*10



NAME : Warm White + RGBW, Twinkle Led Light
Engine With Remote, Mobile App &
Music Control

SIZE : 160*155*55mm

VOLTAGE : DC12V

POWER : 16W

COLOR : RGBW + Warm White

HOLE SIZE : 20mm

VISCO CRYSTAL FOR CEILING



Model : VC0001
Size : L - 45 mm
Dia : D - 15 mm



Model : VC0002
Size : L - 35 mm
Dia : D - 29 mm



Model : VC0003
Size : L - 45 mm
Dia : D - 15 mm



Model : VC0004
Size : L - 45 mm
Dia : D - 20 mm



Model : VC0005
Size : L - 32 mm
Dia : D - 15 mm



Model : VC0006
Size : L - 52 mm
Dia : D - 15 mm




Model : VC0007
Size : L - 45 mm
Dia : D - 20 mm



Model : VC0008
Size : L - 35 mm
Dia : D - 15 mm




Model : VC0009
Size : L - 45 mm
Dia : D - 15 mm

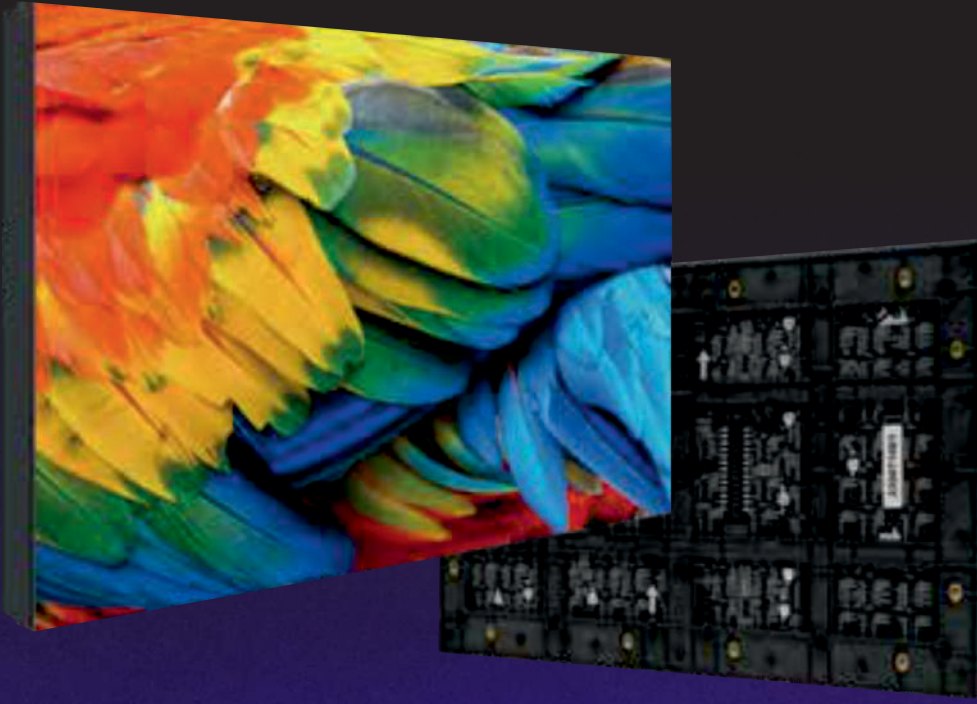

Media Pixel Panel




• Indoor P3.0 High Refresh Rate Led Display Module

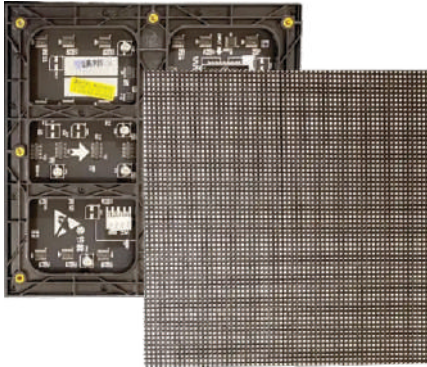


P3 mm - Indoor
 Pixel Pitch : 3.0 mm
 Resolution : 60*64* dots
 LED : SMD2020
 Brightness : ≥ 600 nits
 Refresh Rate : ≥ 3840 Hz
 Port : HUB75E

• Indoor P4 Led Display Module

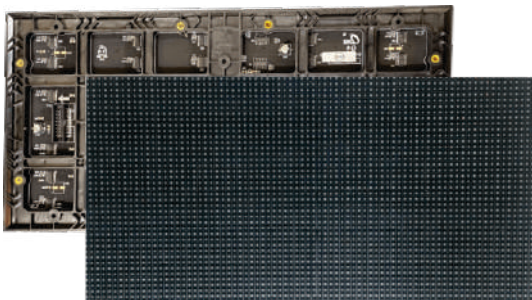

P4 mm - Indoor
 Pixel Pitch : 4.0 mm
 Module Size : 320*160 mm
 Resolution : 80*40* dots
 LED : SMD2020
 Brightness : ≥ 450 nits
 Max Current : ≥ 4.7 A
 Pixel Density : 62500 dots/m
 Refresh Rate : ≥ 1920 Hz
 Port : HUB75E

• P10 Single Color LED Module

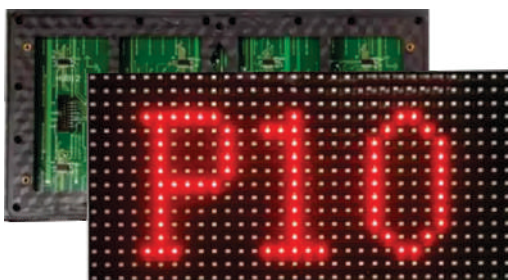

P10 mm - Indoor
 Pixel Pitch : 10 mm
 Resolution : 320mm x 160mm
 LED Type : DIP346 Red
 Module Size : 320 x 160mm
 Model Pixel : 32*16 Pixels

Small & Medium LED Screen Control Card HD-C16C




1. Features :



1. The maximum loading capacity: 122,880 pixels
2. The maximum width support 8192 pixels.
3. Equipped with Wi-Fi, Mobile APP management.
4. With a relay to control the power supply remotely.
5. Support optional 4G connection, Internet remote control.
6. 10 lines HUB75E ports onboard, can be used for one receiving card.

2. Control Mode :

Internet unified management : The play box can be connected to the Internet through 4G (optional), network cable connection, or Wi-Fi Bridge.

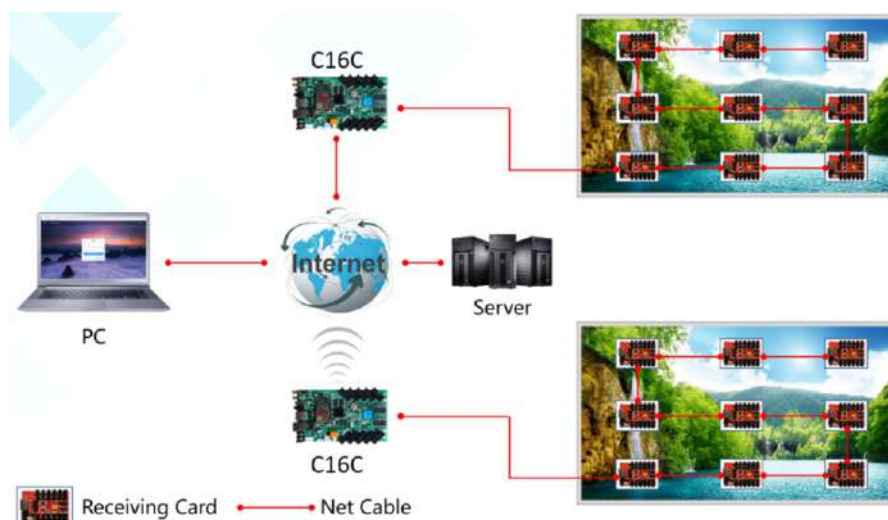

PROFILE LIGHTING

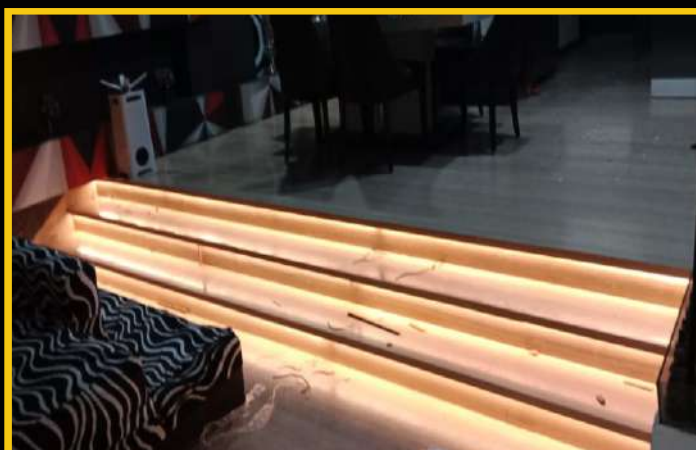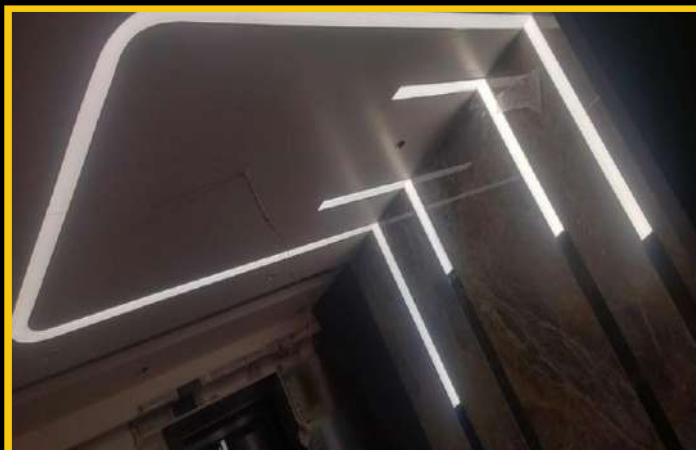

PROFILE LIGHTING









DOWNLIGHTER CATALOGUE

www.visco.in

LED Downlight • 7 Watt Swivel



Application:


Bright, even downlighting for any commercial or residential interior application.

Visco 7 Watt swivel Downlights saturates your interior space with a strong and uniform glow. Their sophisticated recessed designing is perfect as a new downlight installation, or as a retrofit or lighting replacement. The swivel feature allows these lights to conform to most ceilings and room architecture.



Visco Downlights come in varying colour temperatures of whites from 2700K to 5000K. With its crisp shine the 7 Watt fixture is a brighter and more energy efficient lighting alternative to regular pot lights. It produces a consistent colour temperature and is ideal for ceiling heights of 8 to 12 feet.

LED Downlight • 12 Watt Swivel

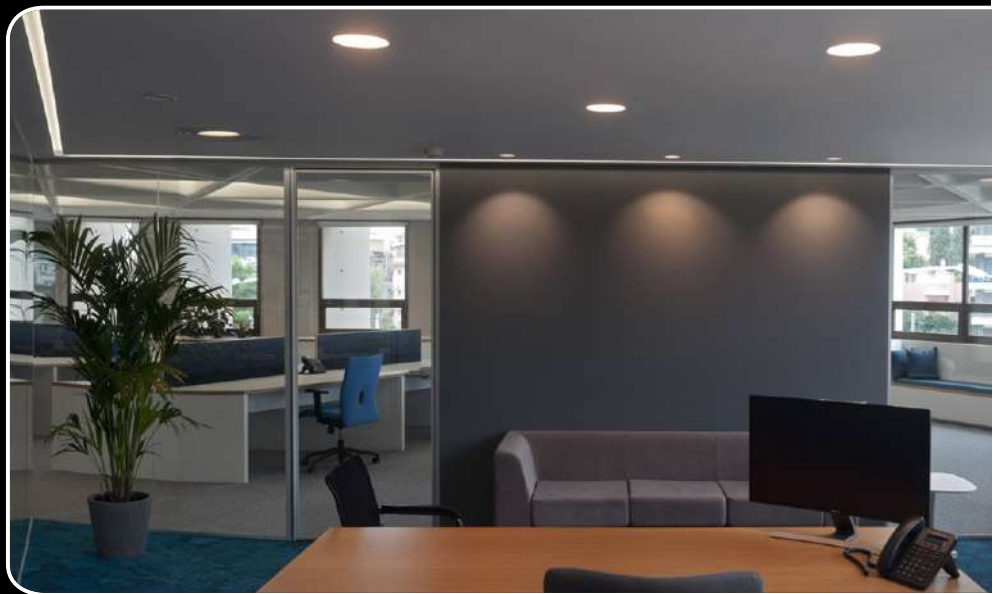

ENZO

COB LIGHT



	MODEL	LED POWER	SIZE (W+H)	CUT OUT	LUMINOUS FLUX
	DRR1201BCW	7 WATT	85 X 75 MM	76 MM	600
	DRR1202BGN	7 WATT	85 X 75 MM	76 MM	600
	DRR1203WCC	7 WATT	85 X 75 MM	76 MM	600
	DRR1204WGC	7 WATT	85 X 75 MM	76 MM	600
	DRR1205WRC	7 WATT	67 X 77 MM	65 MM	600

CCT	: 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE	: 39°
CRI	: ≥ 80
POWER FACTOR	: ≥ 0.90

OPTIONAL

BODY COLOR	: White, Black
REFLECTOR COLOR	: Rose Gold, Chrome, Black, Matt Gold, White
BEAM	: 24°
DIMMABLE	: Triac, Analog, Dali

ENZO

COB LIGHT



	MODEL	LED POWER	SIZE (W+H)	CUT OUT	LUMINOUS FLUX
	DRR1201BCW	12 WATT	85 X 75 MM	76 MM	960
	DRR1202BGN	12 WATT	85 X 75 MM	76 MM	960
	DRR1203WCC	12 WATT	85 X 75 MM	76 MM	960
	DRR1204WGC	12 WATT	85 X 75 MM	76 MM	960
	DRR1205WRC	12 WATT	67 X 77 MM	65 MM	960

CCT : 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE : 39°
CRI : ≥ 80
POWER FACTOR : ≥ 0.90

OPTIONAL

BODY COLOR : White, Black
REFLECTOR COLOR : Rose Gold, Chrome, Black, Matt Gold, White
BEAM : 24°
DIMMABLE : Triac, Analog, Dali

CREST

SURFACE LIGHT



	MODEL	LED POWER	SIZE (W+H)	DRIVER CASING	LUMINOUS FLUX
	DSR7001WWW	7 WATT	76 X 82 MM	INTEGRATED	480
	DSR7002WBW	7 WATT	76 X 82 MM	INTEGRATED	480
	DSR7003BBC	7 WATT	76 X 82 MM	INTEGRATED	480
	DSR7004BGW	7 WATT	76 X 82 MM	INTEGRATED	480
	DSR7005BCW	7 WATT	76 X 82 MM	INTEGRATED	480
	DSR7006BSW	7 WATT	76 X 82 MM	INTEGRATED	480



CCT	: 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE	: 39°
CRI	: ≥ 80
POWER FACTOR	: ≥ 0.90

OPTIONAL

BODY COLOR	: White, Black
REFLECTOR COLOR	: Rose Gold, Chrome, Black, Matt Gold, White
BEAM	: 24°
DIMMABLE	: Triac, Analog, Dali

CREST

SURFACE LIGHT



	MODEL	LED POWER	SIZE (W+H)	DRIVER CASING	LUMINOUS FLUX
	DSR1201WWW	12 WATT	76 X 82 MM	INTEGRATED	600
	DSR1202WBW	12 WATT	76 X 82 MM	INTEGRATED	600
	DSR1203BBC	12 WATT	76 X 82 MM	INTEGRATED	600
	DSR1204BGW	12 WATT	76 X 82 MM	INTEGRATED	600
	DSR1205BCW	12 WATT	76 X 82 MM	INTEGRATED	600
	DSR1206BSW	12 WATT	76 X 82 MM	INTEGRATED	600



CCT	: 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE	: 39°
CRI	: ≥ 80
POWER FACTOR	: ≥ 0.90

OPTIONAL

BODY COLOR	: White, Black
REFLECTOR COLOR	: Rose Gold, Chrome, Black, Matt Gold, White
BEAM	: 24°
DIMMABLE	: Triac, Analog, Dali

SPOT LIGHT

DOWN LIGHTER



	MODEL	LED POWER	SIZE (W+H)	CUT OUT	LUMINOUS FLUX
	DS201BGW	2 WATT	32 x 27 MM	24 MM	200
	DS202WCW	2 WATT	32 x 22 MM	24 MM	200
	DS203BCW	2 WATT	32 x 22 MM	24 MM	200
	DS204WCW	2 WATT	19 x 43 MM	33 MM	200

CCT : 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE : 39°
CRI : ≥ 80
POWER FACTOR : ≥ 0.90

OPTIONAL

BODY COLOR : White, Black
REFLECTOR COLOR : Rose Gold, Chrome, Black, Matt Gold, White
BEAM : 24°

SPOT LIGHT DOWN LIGHTER



	MODEL	LED POWER	SIZE (W+H)	CUT OUT	LUMINOUS FLUX
	DS301BGW	3 WATT	32 x 27 MM	24 MM	300
	DS302WSW	3 WATT	32 x 22 MM	24 MM	300
	DS303BSW	3 WATT	32 x 22 MM	24 MM	300
	DS304WSW	3 WATT	19 x 43 MM	33 MM	300

CCT : 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE : 39°
CRI : ≥ 80
POWER FACTOR : ≥ 0.90

OPTIONAL

BODY COLOR : White, Black
REFLECTOR COLOR : Rose Gold, Chrome, Black, Matt Gold, White
BEAM : 24°

ADJUSTABLE DOWN LIGHTER



	MODEL	LED POWER	SIZE (W+H)	CUT OUT	LUMINOUS FLUX
	DRE1201WBC	12 WATT	70 X 80 MM	65 MM	600
	DSE1202WBC	12 WATT	60 X 155 MM	62 MM	600
	DRE1801BBW	18 WATT	110 X 108 MM	102 MM	1000

CCT	: 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE	: 39°
CRI	: ≥ 80
POWER FACTOR	: ≥ 0.90

OPTIONAL

BODY COLOR	: White, Black
REFLECTOR COLOR	: Rose Gold, Chrome, Black, Matt Gold, White
BEAM	: 24°
DIMMABLE	: Triac, Analog, Dali

LASER BLADE

DOWN LIGHTER



	MODEL	LED POWER	SIZE (W+L)	CUT OUT	LUMINOUS FLUX
	DLB1201BBW	12 WATT	34 x 138 MM	32 MM	1000
	DLB1202BGW	12 WATT	34 x 138 MM	32 MM	1000
	DLB1203WWN	12 WATT	34 x 138 MM	32 MM	1000
	DLB1204WCW	12 WATT	34 x 138 MM	32 MM	1000
	DLB1205BBW	12 WATT	34 x 138 MM	32 MM	1000

CCT	: 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE	: 39°
CRI	: ≥ 80
POWER FACTOR	: ≥ 0.90

OPTIONAL

BODY COLOR	: White, Black
REFLECTOR COLOR	: Rose Gold, Chrome, Black, Matt Gold, White
BEAM	: 24°
DIMMABLE	: Triac, Analog, Dali

TRACK LIGHT DOWN LIGHTER



	MODEL	LED POWER	SIZE (W)	SIZE (L)	LUMINOUS FLUX
	T1201BCW	12 WATT	50 MM	100 MM	1000
	T1202GCW	12 WATT	50 MM	100 MM	1000
	T1203BBW	12 WATT	50 MM	100 MM	1000
	T1204WWW	12 WATT	50 MM	100 MM	1000
	T1205BBW	12 WATT	50 MM	100 MM	1000
	T1206WWW	12 WATT	50 MM	100 MM	1000

CCT : 2700K, 3000K, 3500K, 4000K, 6000K
BEAM ANGLE : 24°
CRI : ≥ 80
POWER FACTOR : ≥ 0.90

OPTIONAL

BODY COLOR : White / Black / Gold / Rose Gold
REFLECTOR COLOR : Rose Gold, Chrome, Black, Matt Gold, White
BEAM : 24°
DIMMABLE : Triac, Analog, Dali

MAGNETIC LIGHT DOWN LIGHTER













VISION SYNERGY CORPORATION

Head Office (Delhi) :

WZ-11A, Keshopur Village, Vikas Puri, New Delhi-110018

Mob.: 8826872664 | Ph. : 7303311781

E-mail : puneet@visco.in | www.visco.in

Branch Office (Bangalore) :

Ground Floor, Shop No. 06, Site No.1, Khatha No. 31/7/1, Haralukunte Village, Begur,
Hobli Bangalore South Taluk, Bengaluru (Bangalore) 560068



: [viscosocial](#)

